

T2327



Temperature Rating: Cone 10

Volume: 14.4 Cubic Feet

Brick Thickness: 3" Brick

Inside: 34.75" D x 27" H


34.75" W
x 26.5" D x
27" H

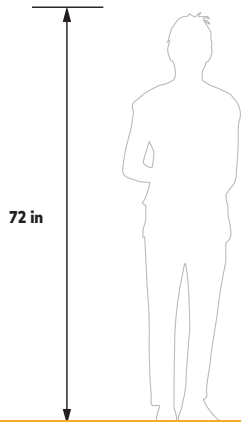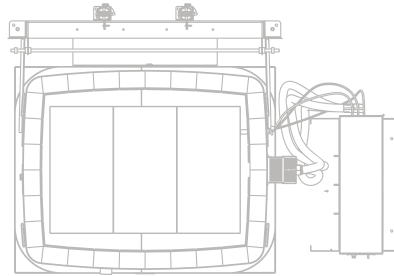

Large volume square and rectangular kilns with adjustable height. DaVinci kilns are great for production and tiles. Includes arched sides for strength and counterbalanced lid.

- **Genesis Touch Screen Control** with Dynamic Zone Control
- **Cone 10 • 2350°F • 1290°C**
- **Counterbalanced Lid** with springs inside of tubes
- **Safety Latches for Lid**
- **Welded angle-iron powder-coated stand and hinge**
- **3" brick**
- **Type K Thermocouples (3)**
 - with protection tubes
- **Strong arched sides** with extra space added to interior dimensions for good air circulation
- **Three elements per 9" section**
- **Ceramic Element Terminals**
- **Hard Ceramic Element Channels**
- **Plug in kiln sections** (except 480 volt models)
- **Floor mounted control panel**
- **c-MET-us listed to UL499 Standards**
- **See hotkilns.com/t2327 for all features and options**

GENERAL DIMENSIONS



TRUST YOUR KILN
hotkilns.com

Manufactured in Swedesboro, NJ
800-750-8350 • sales@hotkilns.com

Bulletin No: BL-T2327 REV: 0

Page 1



Electrical Specifications for T2327


DaVinci Top-Loading Kilns

USA

Standard Models							Powered Bottom Models				
Model Number	Part Number	Volt/Phase	Watts	Amps	Wire Size	Fuse Size	Part Number	Watts	Amps	Wire Size	Fuse Size
T2327-D-240	K-T-2327/31	240/1P	19,510	81.3	1 ga	110	K-T-232P/31	23,844	99.4	1/0	125
T2327-D-240-3P	K-T-2327/32	240/3P	19,510	46.9	6 ga	60	K-T-232P/32	23,844	63.2	3 ga	80
T2327-D-208	K-T-2327/21	208/1P	19,510	93.8	1/0	125	K-T-232P/21	23,844	114.6	3/0	150
T2327-D-208-3P	K-T-2327/22	208/3P	19,510	54.2	4 ga	70	K-T-232P/22	23,844	72.9	1 ga	100
T2327-D-480-3P	K-T-2327/62	480/3P	19,510	23.5	10 ga	30	K-T-232P/62	23,844	31.3	8 ga	40
TB2327-D-240	K-T-232B/31	240/1P	23,010	95.9	1/0	125	K-T-232W/31	28,123	117.2	3/0	150
TB2327-D-240-3P	K-T-232B/32	240/3P	23,010	55.4	4 ga	70	K-T-232W/32	28,123	74.6	1 ga	100
TB2327-D-208	K-T-232B/21	208/1P	23,010	110.6	3/0	150	K-T-232W/21	28,123	135.2	4/0	175
TB2327-D-208-3P	K-T-232B/22	208/3P	23,010	63.9	3 ga	80	K-T-232W/22	28,123	86.0	1 ga	110
TB2327-D-480-3P	K-T-232B/62	480/3P	23,010	27.7	8 ga	40	K-T-232W/62	28,123	36.9	6 ga	50

WORLD

T2327-D-220	K-T-2327/41	220/1P	19,510	88.7	1/0	125	K-T-232P/41	23,844	108.4	3/0	150
T2327-D-380-3PY	K-T-2327/52	380/3PY	19,510	29.6	8 ga	40	K-T-232P/52	23,844	49.3	4 ga	70
T2327-D-400-3PY	K-T-2327/82	400/3PY	19,510	28.3	8 ga	40	K-T-232P/82	23,844	47.1	6 ga	60
T2327-D-415-3PY	K-T-2327/72	415/3PY	19,510	27.1	8 ga	40	K-T-232P/72	23,844	45.1	6 ga	60
TB2327-D-220	K-T-232B/41	220/1P	23,010	104.6	3/0	150	K-T-232W/41	28,123	127.8	4/0	175
TB2327-D-380-3PY	K-T-232B/52	380/3PY	23,010	34.9	6 ga	50	K-T-232W/52	28,123	58.1	3 ga	80
TB2327-D-400-3PY	K-T-232B/82	400/3PY	23,010	33.3	6 ga	50	K-T-232W/82	28,123	55.6	4 ga	70
TB2327-D-415-3PY	K-T-232B/72	415/3PY	23,010	32.0	8 ga	40	K-T-232W/72	28,123	53.3	4 ga	70

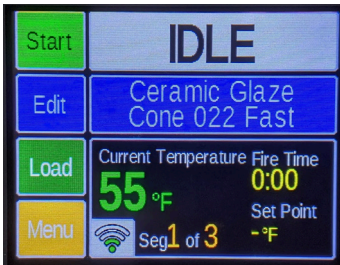

Control: Full digital touchscreen Genesis control with easy-to-use interface, WiFi enabled app, and simple programs for firing ceramics or glass.

For Model Number of Powered Bottom

Model: Add a "PB" after the "D" (Example = T2327-D-PB-240-1).

UL Listing: c-MET-us listed.



FURNITURE KIT FOR T2327

Part Number: H-T-K427/00

Includes: Nine 22" x 11" x 3/4" rectangular shelves (3/4" thick), six each 1/2", 1", 2", 4", 6", and 8" square posts, and one pair heat resistant gloves.

Control Panels: Floor standing panel. NEMA 1 panel are recommended but not required for 480 volts.

TB MODELS: TB models have more power.

480 Volt Models with Quad Element Option: See website kiln pages for electrical specifications.

Crating: Comes fully crated. Easily disassembles for installation.

TRUST YOUR KILN
hotkilns.com

Manufactured in Swedesboro, NJ
800-750-8350 • sales@hotkilns.com

Bulletin No: BL-T2327 REV: 0

Page 2

